

## DECLARATION OF PERFORMANCE

### DoP 0261

for fischer-Zykon-panel anchor FZP II

EN

- |                                                                                                  |                                                                                                                                                           |                             |
|--------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|
| 1. <u>Unique identification code of the product-type:</u>                                        | <b>DoP 0261</b>                                                                                                                                           |                             |
| 2. <u>Intended use/es:</u>                                                                       | <b>Fastener for the rear fixing of façade panels made of selected natural stones according to EN 1469:2015, see appendix, especially annexes B1 - B7.</b> |                             |
| 3. <u>Manufacturer:</u>                                                                          | <b>fischerwerke GmbH &amp; Co. KG, Klaus-Fischer-Str. 1, 72178 Waldachtal, Germany</b>                                                                    |                             |
| 4. <u>Authorised representative:</u>                                                             | -                                                                                                                                                         |                             |
| 5. <u>System/s of AVCP:</u>                                                                      | <b>2+</b>                                                                                                                                                 |                             |
| 6. <u>European Assessment Document:</u>                                                          | <b>EAD 330030-00-0601</b>                                                                                                                                 |                             |
| European Technical Assessment:                                                                   | <b>ETA-11/0145; 2018-07-01</b>                                                                                                                            |                             |
| Technical Assessment Body:                                                                       | <b>DIBt- Deutsches Institut für Bautechnik</b>                                                                                                            |                             |
| Notified body/ies:                                                                               | <b>2873 TU Darmstadt</b>                                                                                                                                  |                             |
| 7. <u>Declared performance/s:</u>                                                                |                                                                                                                                                           |                             |
| <b>Mechanical resistance and stability (BWR 1)</b>                                               |                                                                                                                                                           |                             |
| Characteristic resistance to breakout or pull-out failure under tension load:                    | Annex C1                                                                                                                                                  |                             |
| Characteristic resistance to breakout or pull-out failure under shear load:                      | Annex C1                                                                                                                                                  |                             |
| Characteristic resistance to breakout or pull-out failure under combined tension and shear load: | Annex C1                                                                                                                                                  | Y=NPD; F <sub>Rk</sub> =NPD |
| Edge distance and spacing:                                                                       | Annexes B2, C1                                                                                                                                            |                             |
| Durability:                                                                                      | Annex A3 (CRC-III)                                                                                                                                        |                             |
| Characteristic resistance to steel failure under tension and shear load:                         | NPD                                                                                                                                                       |                             |
| <b>Safety in case of fire (BWR 2)</b>                                                            |                                                                                                                                                           |                             |
| Reaction to fire:                                                                                | Class (A1)                                                                                                                                                |                             |
| 8. <u>Appropriate Technical Documentation and/or</u>                                             | -                                                                                                                                                         |                             |
| <u>Specific Technical Documentation:</u>                                                         |                                                                                                                                                           |                             |

The performance of the product identified above is in conformity with the set of declared performance/s. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.

Signed for and on behalf of the manufacturer by:



Dr.-Ing. Oliver Geibig, Managing Director Business Units & Engineering  
Tumlingen, 2021-01-11



Jürgen Grün, Managing Director Chemistry & Quality

This DoP has been prepared in different languages. In case there is a dispute on the interpretation the English version shall always prevail.

The Appendix includes voluntary and complementary information in English language exceeding the (language-neutrally specified) legal requirements.

## Specific Part

### 1 Technical description of the product

The fischer-Zykon-panel anchor FZP II is a special anchor of sizes M 6, M 8 and M 10 which consists of a cone bolt (with external thread or internal thread), an expansion part, a sleeve and, if need be, a nut. Cone bolt and expansion part are made of stainless steel. The sleeve is made of stainless steel or carbon. The nut is made of stainless steel or aluminium. The anchor is put into an undercut drill hole and by driving-in of the sleeve it is placed form-fit.

The product description is given in Annex A.

### 2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchors of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

### 3 Performance of the product and references to the methods used for its assessment

#### 3.1 Mechanical resistance and stability (BWR 1)

| Essential characteristic                              | Performance                                                              |
|-------------------------------------------------------|--------------------------------------------------------------------------|
| Characteristic resistance for tension and shear loads | See Annex C 1                                                            |
| Anchor distances and spacing                          | See Annex B 3 and Annex C 1                                              |
| Durability                                            | Corrosion Resistance Class (CRC) III in accordance with EN 1993-1-4:2015 |

#### 3.2 Safety in case of fire (BWR 2)


| Essential characteristic | Performance             |
|--------------------------|-------------------------|
| Reaction to fire         | Class A1                |
| Resistance to fire       | No performance assessed |

### 4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with EAD No. 330030-00-0601 the applicable European legal act is: [97/161/EG].  
The system to be applied is: 2+


## Mounting condition

Figure A1:

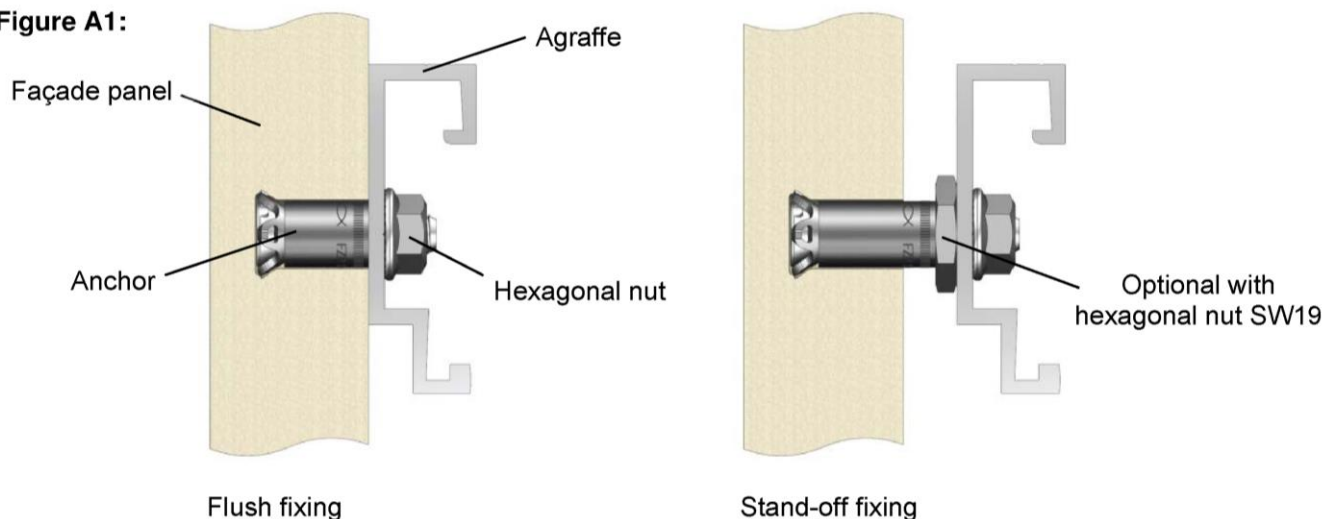

## Example of façade panel on substructure

Figure A2:

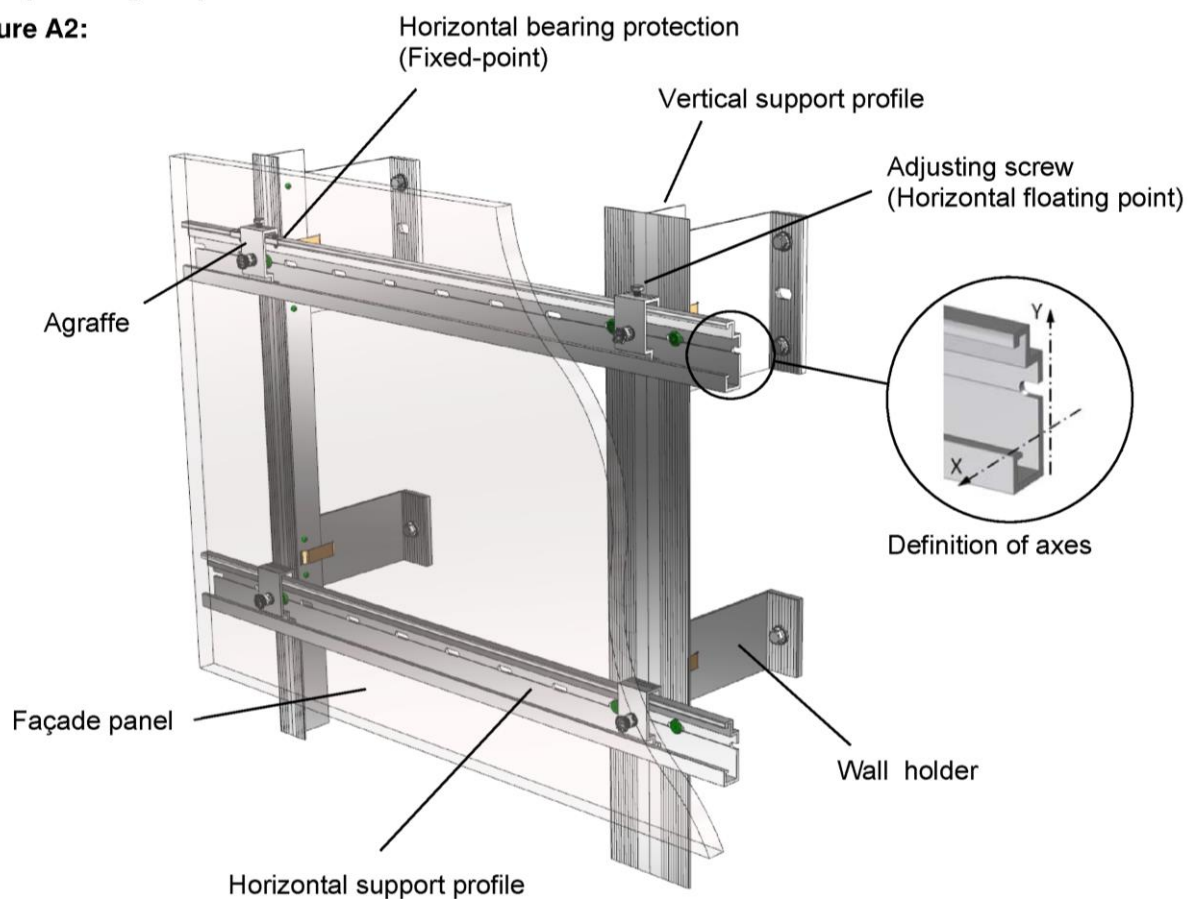

## fischer Zykon panel anchor FZP

### Product description

Product and built-in state

## Annex A 1

Type of anchor

Anchor with external thread

Figure A3:

With carbon fibre sleeve



With steel sleeve



With carbon fibre sleeve and sleeve flange



With Steel sleeve and hex nut SW19



With steel sleeve and hex nut ES <sup>1)</sup>



<sup>1)</sup> Hex nut ES for suspension systems

Anchor with internal thread

Figure A4:


With carbon fibre sleeve



With steel sleeve



Identification system

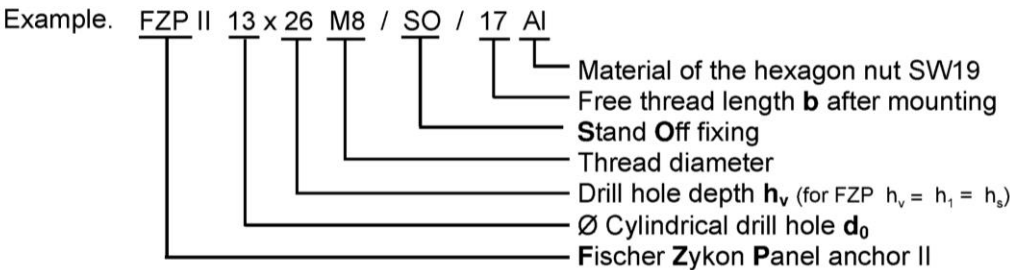

fischer Zykon panel anchor FZP

Product description  
Type of anchor and identification system

## Parts of anchor and materials

### Cone bolt

**Figure A5:**

With external thread  
M6 / M8 / M10

With internal thread  
M6 / M8

Material identification

Option:

Anti rotation lock

Nose or frontal profiling

Option:

Identifying mark, drive, e.g.: Slot;  
polygonal (Outside; inside);  
spanner flats

### Expansion part

**Figure A6:**



### Sleeve

**Figure A7:**

Carbonfibre

Stainless steel



Type designation e.g.  FZP...

## Supplementary components

**Figure A8:**

Hex nut SW 19

Hex nut ES



Identifying mark of the producer 

Marking: Al = Aluminum

Optional: A4 = stainless steel

**Table A1: Material of anchor parts**

| Anchor parts       | Material                                                 |
|--------------------|----------------------------------------------------------|
| Cone bolt          | Stainless steel, EN 10088 :2014                          |
| Expansion part     | Stainless steel, EN 10088 :2014                          |
| Sleeve             | Stainless steel, EN 10088 :2014                          |
| Carbonsleeve       | Polyamide 6.6 CF                                         |
| Hexagonal nut SW19 | Aluminium, EN 755 :2016, Stainless steel, EN 10088 :2014 |
| Hexagonal nut ES   | Aluminium, EN 755 :2016, Stainless steel, EN 10088 :2014 |

## fischer Zykon panel anchor FZP

### Product description

Parts of anchor and material

## Annex A 3

## Specifications of intended use

### Anchorage subject to:

- Static and quasi-static loads.

### Anchorage ground:

- Natural stone facade panels according to EN 1469:2015.
- The used material is free of crevices and mechanically effective cracks and alterations.
- Natural stone classified in accordance with Table B1.
- Characteristic values of the panels correspond to Table B2.

**Table B1: Stone groups for façade panels made of natural stone**

| Stone group |                                                                   | Natural stone type                                                                      | Boundary conditions                                                                                 |
|-------------|-------------------------------------------------------------------|-----------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|
| I           | High quality intrusive rocks (plutonic rocks)                     | Granite, granitite, tonalite, diorite, monzonite, gabbro, other magmatic plutonic rocks | None                                                                                                |
| II          | Metamorphic rocks with „hard stone characteristics“               | Quarzite, granulite, gneiss, migmatite                                                  | None                                                                                                |
| III         | High quality extrusive rocks (volcanic rocks)                     | Basalt and basaltic lava without harmful ingredients (like sun burner basalt)           | Minimum density $\rho$ :<br>basalt: 2,7 kg/dm <sup>3</sup><br>basaltic lava: 2,2 kg/dm <sup>3</sup> |
| IV          | Sedimentary rocks with „hard stone characteristics“ <sup>1)</sup> | Sandstone, limestone and marble                                                         | Sandstone: 2.1 kg/dm <sup>3</sup>                                                                   |

- <sup>1)</sup> For façade panels made of natural stones with planes of anisotropies, the difference between the flexural strength determined parallel to the planes of anisotropy and perpendicular to the edges of the planes of anisotropy shall not be more than 50 %.

### Use conditions (Environmental conditions):

- In accordance with EN 1993-1-4:2015 dependent on Corrosion Resistancy Class (CRC) (ETA Section 3.1)

## fischer Zykon panel anchor FZP

Intended use  
Specifications

## Annex B 1

Appendix 5 / 12

## Design:

- The design of anchorages under static and quasistatic load is carried out in accordance with: EOTA Technical Report TR 062 "Design of fasteners for façade panels made of natural stone".
- The façade panels, their fixings as well as the substructure including its connection to wall brackets and their connection to the construction works are designed for the respective case of application under the responsibility of an engineer skilled in the field of façade construction.
- Verifiable calculation notes and drawings shall be prepared taking account of the loads to be anchored, the nature and strength of the base materials and the dimensions of the anchorage members as well as of the relevant tolerances. The position of the anchor is indicated on the design drawings.

## Installation:

- The drillings are done at the factory or on site under workshop conditions; when making the drillings on site the execution is supervised by the responsible project supervisor or a skilled representative of the project supervisor.
- Making of the undercut drilling is done with a special drill bit or a special CNC drill bit according to Annex B 4 and a special drilling device in accordance with the information deposited with Deutsches Institut für Bautechnik.
- The drilling residues are removed from the drill hole.
- In case of aborted hole: new drilling at a minimum distance away of twice the depth of the aborted hole.
- The geometry of the drill hole is checked on 1 % of all drillings. The following dimensions shall be checked and documented according to manufacturer's information and testing instructions by means of a control aids according to Annex B 7, Figure B5, B6 and B7.
  - Diameter of the cylindrical drill hole.
  - Diameter of the undercut.
  - Remaining wall thickness (drill hole depth and panel thickness respectively).
- If the tolerance given in Annex B 4, Table B2 is exceeded, the geometry of the drill hole shall be checked on 25 % of the drillings performed. No further drill hole may exceed the tolerances otherwise all the drill holes shall be controlled. Drilling holes falling below or exceeding the tolerances shall be rejected.

Note: Checking the geometry of the drill hole on 1 % of all drillings means that on one of the 25 panels (this corresponds to 100 drillings for panels with 4 undercut anchors) one drilling shall be checked. If the tolerances given in Annex B 4 Table B2 are exceeded the extent of the control shall be increase to 25 % of the drillings, i.e. one drilling each shall be checked on all the 25 panels.

- The anchors are installed in a deformation controlled manner. For this purpose suitable installation tools per Annex B 5, Figure B4 shall be used. The anchor is set correctly if the bolt projection "b" in accordance to Annex A 2 (designation system) according to Annex B 6 Figure B9 and B10 is observed. For flush mounting, the sleeve must not project beyond the plate surface. Internal thread anchors are mounted flush or recessed according to Annex B 6.
- During transport and storage on site the façade panels are protected from damages; the façade panels are not to be hung up jerkily (if need be lifters shall be used for hanging up the façade panels); façade panels and reveal panels respectively with incipient cracks are not be installed.
- The façade panels are arranged in a "reclined" or "upright" position, they also may be fixed at façade soffits.
- The façade are installed by skilled specialists and the laying instructions of the manufacturer shall be paid attention to.
- The façade panels must not be used for the transmission of scheduled impact loads and for the protection against falling.
- Overhead installation is allowed (e.g.: fastening cladding of ceilings)

### fischer Zykon panel anchor FZP

Intended use  
Specifications

### Annex B 2


Appendix 6 / 12

**Table B2: Characteristic values of façade and reveal panels made of nature stones**

| Façade panels                                                        |                |                      |         |                           |
|----------------------------------------------------------------------|----------------|----------------------|---------|---------------------------|
| Nominal panel thickness                                              |                | $h_{nom}$            | [mm]    | $20\ (30)^1 \leq h_{nom}$ |
| Maximum panel size                                                   |                | A                    | [m²]    | 3,0                       |
| Maximum side lenght                                                  |                | H bzw. L             | [m]     | 3,0                       |
| Number of anchors (rectangular arrangement)                          |                | N                    | [-]     | 4                         |
| Embedment depth <sup>2)</sup>                                        |                | $h_s$                | [mm]    | $12 \leq h_s \leq 38$     |
| Minimum edge distance <sup>3)</sup>                                  |                | $a_{rL}$ or $a_{rH}$ | [m]     | 50                        |
| Maximum edge distance                                                |                | $a_{rL}$ or $a_{rH}$ | [mm]    | 0,25 L bzw. 0,25 H        |
| Minimum spacing <sup>3)</sup>                                        |                | $a_L$ or $a_H$       | [mm]    | 8 $h_s$                   |
| Minimum residual wall thickness <sup>4)</sup>                        |                | $h_r$                | [mm]    | 0,4 $h_{nom}$             |
| Minimum characteristic flexural strength in accordance with EN 12372 |                |                      |         |                           |
| Padang Cristallo G603, China                                         | Stone group I  | $\sigma_{5\%} \geq$  | [N/mm²] | 13,4                      |
| Jura Limestone (yellow), Germany                                     | Stone group IV | $\sigma_{5\%} \geq$  | [N/mm²] | 12,4                      |

- <sup>1)</sup> For sandstone, limestone and basaltlava: panel thickness  $h \geq 30$  mm, if the bending strength of the material  $\sigma_{5\%} < 8$  N/mm<sup>2</sup>.
- <sup>2)</sup>  $h_s = (h_1) = (h_v)$  in 1 mm steps only (12, 13, 14 mm ... 38 mm) - tolerances see Annex B 4, Table B3, footnote <sup>3)</sup>
- <sup>3)</sup> For small fitting, differential or fill in pieces, the minimum edge distance or spacing shall be chosen constructively. In case of design under static loading using FEM, smaller edge distances are allowed.
- <sup>4)</sup> Only for stand-off fixing.

**Figure B1: Definition of edge and centre distance**

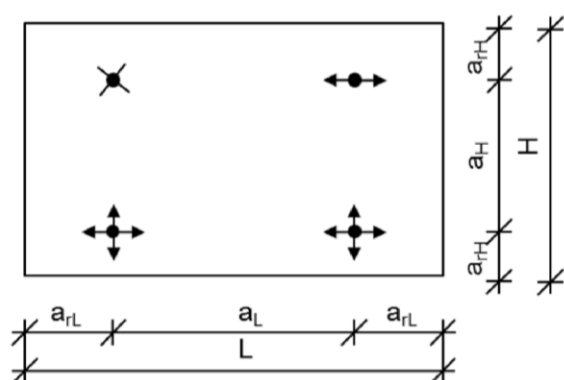

**Legende:**

- $a_{rL}, a_{rH}$  = Edge distance – anchor distance to the panel edge
- $a_L, a_H$  = Spacing – Distance between the anchors
- L = Length of the panel in horizontal direction
- H = Length of the panel in vertical direction
-  = Fixed bearing (fixed support)
-  = Horizontal slide bearing (slide support)
-  = Horizontal and vertical slide bearing (slide support)

**fischer Zykon panel anchor FZP**

**Intended use**  
Requirements of façade panels

**Annex B 3**

Appendix 7 / 12

Table B3: Drill hole dimensions


| Drill hole                              |                                      |                                      |           |             |                             |                          |
|-----------------------------------------|--------------------------------------|--------------------------------------|-----------|-------------|-----------------------------|--------------------------|
| Drill bit $\varnothing f$ <sup>1)</sup> | $\varnothing d_0$ [mm] <sup>2)</sup> | $\varnothing d_1$ [mm] <sup>2)</sup> | FZPII     | n           | $h_1$ [mm] <sup>2) 3)</sup> | $h_r$ [mm] <sup>4)</sup> |
| FZPB 9                                  | 11<br><div>+0,4<br/>-0,2</div>       | 13,5 $\pm 0,3$                       | M6        | $\approx 4$ | $12 \leq h_1 \leq 38$       | $\geq 0,4 h$             |
| FZPB 11                                 |                                      |                                      |           |             |                             |                          |
| FZPB 11                                 | 13<br><div>+0,4<br/>-0,2</div>       | 15,5 $\pm 0,3$                       | M8 / M6i  |             |                             |                          |
| FZPB 13                                 |                                      |                                      |           |             |                             |                          |
| FZPB 13                                 | 15<br><div>+0,4<br/>-0,2</div>       | 17,5 $\pm 0,3$                       | M10 / M8i |             |                             |                          |
| FZPB 15                                 |                                      |                                      |           |             |                             |                          |

- 1) Drill bits for various drilling methods.
- 2) Dimensions can be checked with the appropriate control equipment in accordance with (Annex B 5).
- 3) Tolerances flush mounting:  $h_1 = h_v$  <sup>+0,4</sup>  
<sub>-0,1</sub>
- 4) Only for stand off fixing.

Figure B2: Drill bit example



Figure B3: Geometrie of drill hole

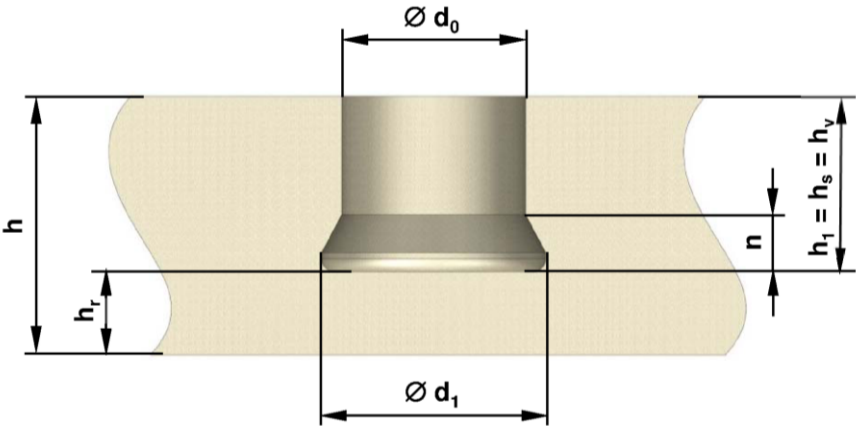

fischer Zykon panel anchor FZP

Intended use  
Drill bit, geometry of the drill hole and installation parameters


Annex B 4

## Setting tools


Figure B4:



Drive in tool  
FZE

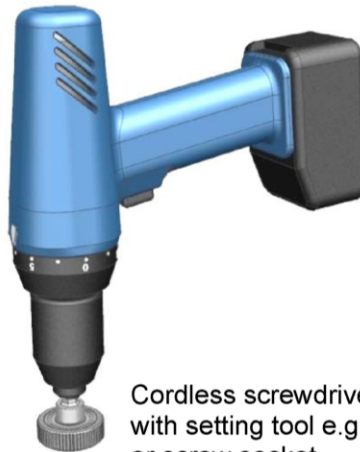


Cordless screwdriver  
with setting tool e.g. SGA  
or screw socket

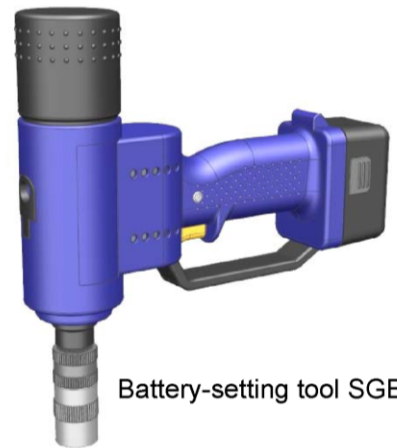


Battery-setting tool SGB

## Means for undercut control $\varnothing d_1$

Figure B5:

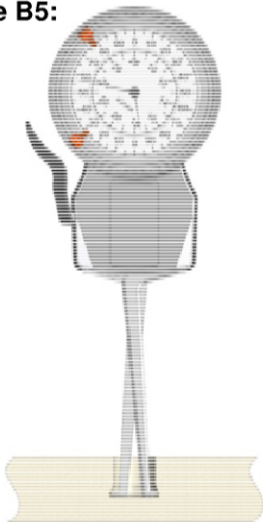


Internal quicktest

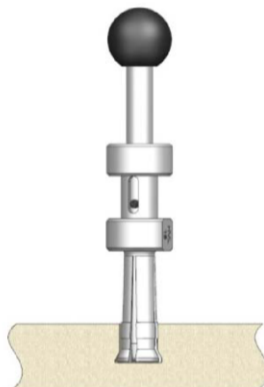

HVL (Undercut minimum volume gauge)

## Go / no Go gauge for checking cylindrical drill hole diameter $\varnothing d_0$


Figure B6:



DPL (Diameter gauge)

## Means for measuring borehole depth $h_1$ and borehole diameter $h_0$

Figure B7:

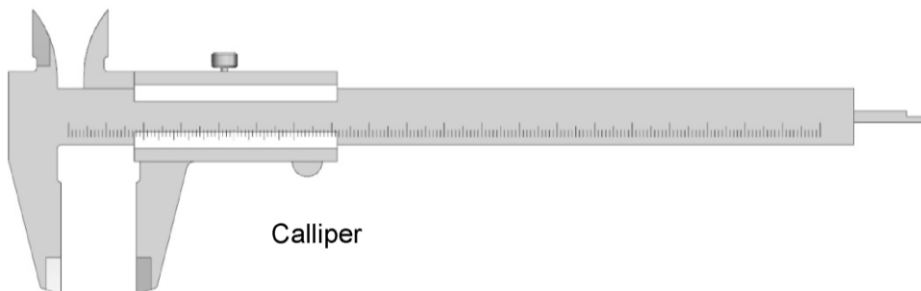

Calliper

**fischer Zykon panel anchor FZP**

**Intended use**

Setting devices and testing equipment


**Annex B 5**

Appendix 9 / 12

## Type of mounting and dimensional definition


### Recessed fixing

Figure B8:

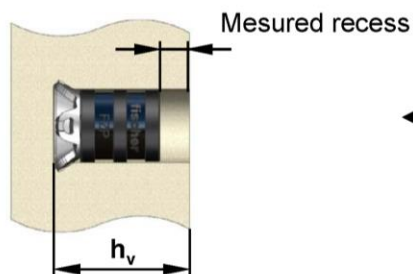


### Examples of an adaptation for stand off fixing

Figure B9:

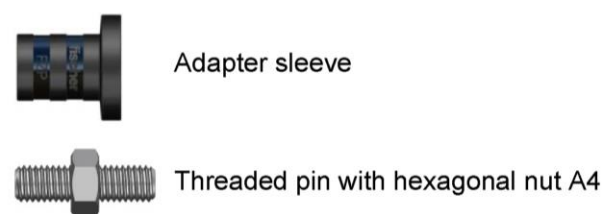


### Flush fixing

Figure B10:

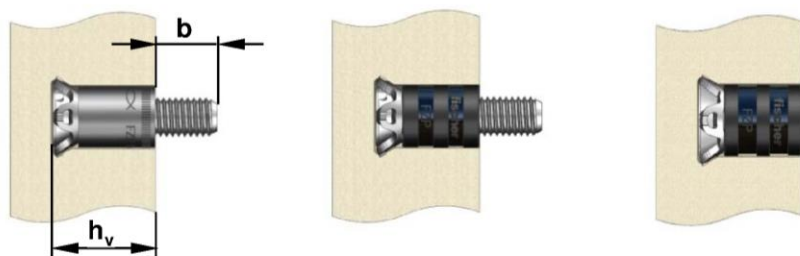

### Stand off fixing

Figure B11:

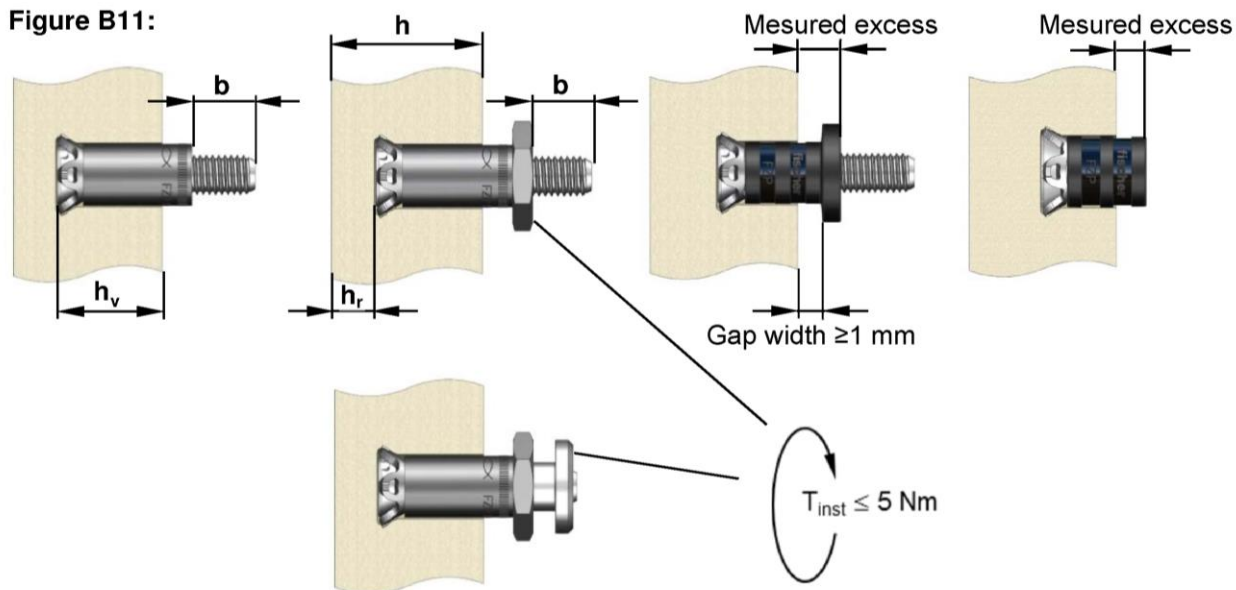

fischer Zykon panel anchor FZP

Intended use  
Mounting types and dimension definitions

Annex B 6

Appendix 10 / 12


## Installation instructions

Example: Set with SGA


1.)




2.)

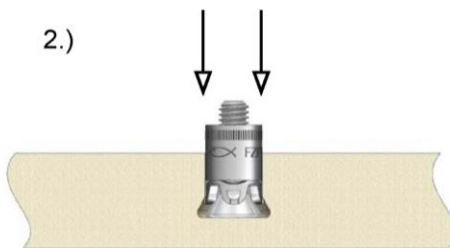


3.)

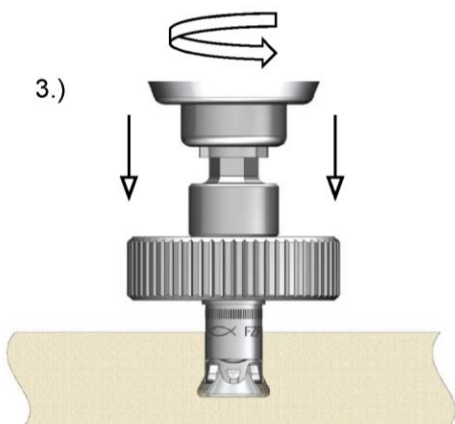


4.)

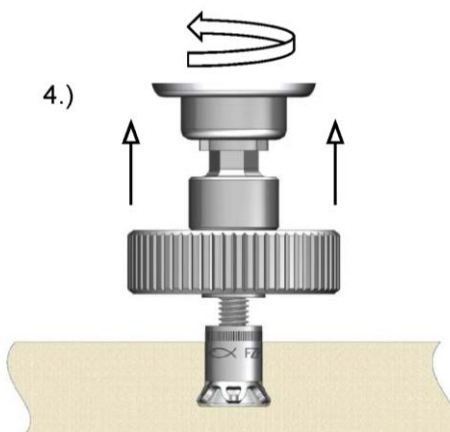

5.1)

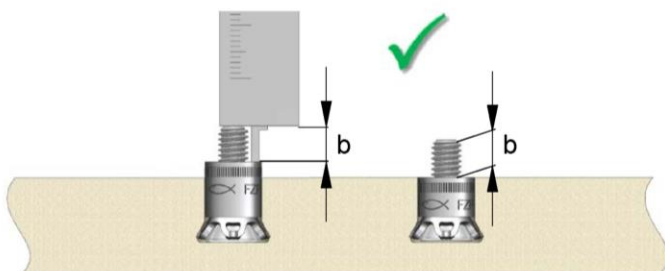

5.2)

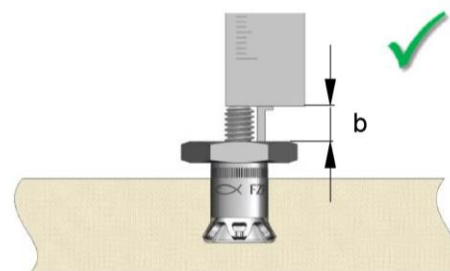

**fischer Zykon panel anchor FZP**

**Intended use**  
Installation instructions

**Annex B 7**

Appendix 11 / 12

**Table C1: Characteristic resistance**

| Diameter of drill hole          |                                  |      | 11 (FZP M6)                 |                               | 13 (FZP M8 / M6i)           |                               |
|---------------------------------|----------------------------------|------|-----------------------------|-------------------------------|-----------------------------|-------------------------------|
| Designation of natural stone    |                                  |      | Padang<br>Cristallo<br>G603 | Jura<br>Limestone<br>(yellow) | Padang<br>Cristallo<br>G603 | Jura<br>Limestone<br>(yellow) |
| Country of origin               |                                  |      | China                       | Germany                       | China                       | Germany                       |
| Petrographic description        |                                  |      | Granite                     | Limestone                     | Granite                     | Limestone                     |
| Panel thickness                 | h                                | [mm] | 30                          | 40                            | 30                          | 40                            |
| Edge distance                   | a <sub>r</sub>                   | [mm] | 100                         | 100                           | 100                         | 100                           |
| Embedment depth                 | h <sub>s</sub>                   | [mm] | 15                          | 17                            | 17                          | 25                            |
| Characteristic resistance       |                                  |      |                             |                               |                             |                               |
| Tension load                    | N <sub>Rk</sub> <sup>1) 2)</sup> | [kN] | 6,2                         | 4,8                           | 7,8                         | 8,0                           |
| Sher load                       | V <sub>Rk</sub> <sup>1) 2)</sup> | [kN] | 7,8                         | 7,9                           | 7,0                         | 9,1                           |
| Partial safety factor           | γ <sub>M</sub>                   | [-]  | 1,8                         |                               |                             |                               |
| Combined tension and shear load |                                  |      |                             |                               |                             |                               |
| Trilinear limit value           | X                                | [-]  | 1,2                         |                               |                             |                               |

1) Reduction factor  $\alpha$  based on stone class is already included in these values. Reduction factor  $\alpha$  in accordance with Technical Report 062 "Design of fasteners for façade panels made of natural stone".

2) For other natural stones according to Table B1, the resistance is determined in accordance with EAD 33-0030-0601 and Technical Report "Design of fasteners for façade panels made of natural stone".

**Table C2: Characteristic resistance for steel failure**

| Diameter of drill hole and Anchor $\varnothing d_0$ [mm] |  |  | 11<br>FZP M6       | 13<br>FZP M8 | 15<br>FZP M10 | 13 <sup>2)</sup><br>FZP M6i | 15 <sup>2)</sup><br>FZP M8i |
|----------------------------------------------------------|--|--|--------------------|--------------|---------------|-----------------------------|-----------------------------|
| Characteristic resistance under tension load             |  |  | $N_{Rk,s}$         | [kN]         | 15,1          | 27,5                        | 14,1                        |
| Partial safety factor                                    |  |  | $\gamma_{Ms}^{1)}$ | [-]          | 1,5           | 1,87                        |                             |
| Characteristic resistance under shear load               |  |  | $V_{Rk,s}$         | [kN]         | 7,5           | 13,7                        | 7,0                         |
| Partial safety factor                                    |  |  | $\gamma_{Ms}^{1)}$ | [-]          | 1,25          | 1,56                        |                             |

1) In absence of national regulations

2) For the anchor with internal thread only a fixing screw of size M6 or M8 made of stainless steel 1.4401 or 1.4571 EN ISO 10088-3 with a minimum strength class 70 according to EN ISO 3506-1 ( $f_{uk} = 700 \text{ N/mm}^2$ ,  $f_{yk} = 450 \text{ N/mm}^2$ ) can be used

**fischer Zykon panel anchor FZP****Performances**

Characteristic resistance in natural stone and steel resistance

**Annex C 1**

Appendix 12 / 12